

# OMGASTOP™

NUMERICALLY CONTROLLED POSITIONING STOP


*WOOD be nice.*




OMGASTOP





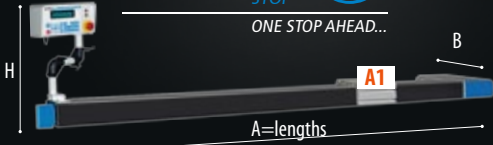


Transmission with cogged belt features a core made of steel cables. The carriage rides along interchangeable hardened steel tracks for added accuracy and durability.

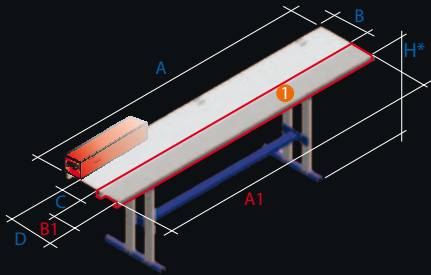

A=Lengths	OMGA Stop 6	OMGA Stop 10	OMGA Stop 13	OMGA Stop 16	OMGA Stop 22	OMGA Stop 30
	6 Feet	10 Feet	13 Feet	16 Feet	22 Feet	30 Feet
A1 Carriage Stroke	108"	147"	187"	226"	293"	392"
B	19"					
C	20"					
Lbs	109	133	158	182	223	283
A	106"	145"	184"	224"	290"	389"
B	14"					
C	9"					
A1	106"	145"	184"	224"	290"	--
B1	8"					
D	17"					
H*	* 32" ÷ 39"					

**1 WIDTH EXTENSION KIT**

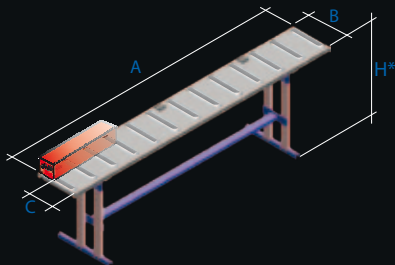

A	118"	158"	197"	236"	276"	394"
B	12" MITRE SAWS					
	24" RADIAL ARM SAWS					
C	7.5" MITRE SAWS					
	19" RADIAL ARM SAWS					
H	* 32" ÷ 39"					
Lbs	243	291	412	485	529	776
	MITRE SAWS					
Lbs	335	410	580	670	750	1080
	RADIAL ARM SAWS					

	Adjustable feet with three preset positions Also for roller tables
	Pushing capacity on sheet metal tables 100 lbs
	Pushing capacity on roller tables 175 lbs
	Feed speed 200 ft/min
	Rating: 400 W - Rated Voltage: 110/230 V Rated Current: 3.64 / 1.74 A - Frequency: 60 Hz
	Operating temperature 41° ÷ 113° F
	Humidity (without condensation) 5% ÷ 85%

2900204552.00

**OMGA, Inc.**

3705 William Richardson Drive  
South Bend, IN 46628  
USA  
Tel.: +1 (574) 243-0120  
Fax: +1 (574) 243-0216  
Toll Free: 1-800-233-OMGA (6642)  
E-mail: info@omgainc.com

**WWW.OMGAINC.COM**

